

# Rapidlogger™

## Job Monitoring System for Wireline and Slickline Units



At Rapidlogger Systems we have designed and developed a range of products for use in the oilfield. Our products are extremely rugged and designed for the harsh oilfield and petrochemical environments. The Rapidlogger system enhances operational safety and improves operations through its efficiency and ease of use.

### Highlights

The Rapidlogger is a compact and cost-effective system for job monitoring and recording on wireline, slickline and coiled tubing units.

It is the most efficient system available in the market today. The system is simple to use and an equipment operator can use the system without any training. Job data can be recorded on removable and upgradeable MMC/SD flash memory cards. The standard system has 4 analog data channels, 2 frequency channels. The system also has 2 high current solid state relay outputs and one analog output. The system is expandable and more data acquisition channels can be added as required.


The Rapidlogger does not need a PC for operation. However if needed it can transmit data to a PC in real time. The large internal memory can record many months of job data for future retrieval. The package is very compact and suitable for mounting

in the control cabs of wireline, slickline systems and coiled tubing trucks.

### Slickline Mode

When used in the slickline mode, the system measures, displays and records: depth, speed, line tension, wellhead pressure, and other parameters that the operator may choose. The system can also correct the depth for line stretch and thermal expansion. It can also shutdown the wireline or slickline winch with a solenoid valve based on a line over-pull condition.

The Rapidlogger panel runs a real-time embedded operating system on its rugged high-speed microprocessor. The real-time operating system allows the system to turn on instantly and be crash proof. The RapidVu is the software for graphing and preparing job reports and runs on a PC computer. It can display realtime graphs and easily prepare job reports for the operator.

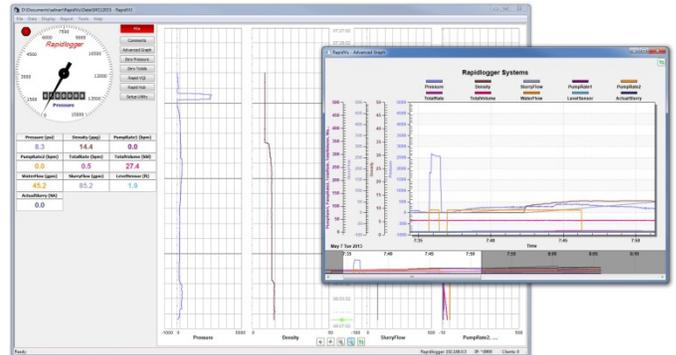

### Specifications

Operating Temperature	-40C to 70C
Operating Environment	NEMA 4X
Analog Inputs	4/16 max, 24bit
Frequency/Depth Inputs	2/4 max
Digital Outputs	8/16 max
Analog Outputs	4/8 max
Display	LCD w/ Backlight
Computer Interface	Serial, Ethernet, WiFi
Power	12/24DC, 110/240AC
Job Memory	16GB

